



FARRINO PORCELAIN DECKING

TECHNICAL DATA SHEET

FARRINO PARMA PORCELAIN DECKING



TECHNICAL DATA SHEET

Farrino 20mm thick Italian manufactured porcelain tiles are available in a range of styles, sizes and colours. Farrino porcelain decking is available in six finishes, shown below.

Please visit our website or our London Design Studio for more information or to see samples

Product finishes



Cocoa

Flax

Mogno

Oak

Pearl

Smoke

Farrina tile range

STYLE	COLOUR	LRV VALUE	THICKNESS	200 X 200MM
Farrino Parma Porcelain	Cocoa	23.83	20mm	601001
Deck board	Oak	38.38	20mm	601002
	Mogno	28.65	20mm	601003
	Flax	22.13	20mm	601004
	Pearl	45.07	20mm	601005
	Smoke	34.78	20mm	601006

Packaging and weights

TILE SIZE	THICKNESS	BOX SPECIFICATION		PALLET SPECIFICATION		
		PIECES/ BOX	Kg/ BOX	TILES/ PALLET	SQM/ PALLET	Kg/ PALLET
200 x 1200	20mm	2	33Kg	60	21m ²	≈990Kg

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com

FARRINO PARMA PORCELAIN DECKING

TECHNICAL DATA SHEET



Regularity characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Length and width	ISO 0545-2	±0.6%	±2mm	≥3400N
Thickness	ISO 0545-2	±5.0%	±0.5mm	≥2720N
Squareness	ISO 0545-2	±0.5%	±2mm	≤1.8mm
Straightness of sides	ISO 0545-2	±0.5%	±1.5mm	≥13mm
Surface flatness	ISO 0545-2	±0.5%	±2mm	≤7.0%

Structural characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Water absorption	ISO 0545-3	±0.5%		±0.1%
	ASTM C373			In accordance
Breaking strength	ISO 0545-4	≥1300N		≥7,288N
Modulus of rupture	ISO 0545-4	≥35mm ³		≥45 N/mm ³
Breaking load class	EN1339	±0.5%		U 11
				T11

Surface characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED	FARRINO VALUES
Resistance to deep abrasion	ISO 0545-6	≤175mm ³	≤155mm ³

Thermal and Hygrometric characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED	FARRINO VALUES
Coefficient of linear thermal expansion	ISO 0545-8	Test method available	<7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	ISO 0545-9	Test method available	Guaranteed
Frost resistance	ISO 0545-12	Required	In accordance

Chemical characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED	FARRINO VALUES
Chemical resistance	ISO 0545-13	Test method available	Guaranteed
Stain resistance	ISO 0545-14	Test method available	Guaranteed

Find out more or request a sample

Email sales@raaftsystems.com or visit raaftsystems.com

FARRINO PARMA PORCELAIN DECKING

TECHNICAL DATA SHEET




Slip resistance

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED	FARRINO VALUES
Dynamic slider	BCRA	Test method available	>0.4
Static slider	ASTM C1028	Test method available	-
Inclined platform	DIN 51130	Test method available	R11
Pendulum test value (PTV) - dry	BS EN 14231	36+	72
Pendulum test value (PTV) - wet	BS EN 14231	36+	65

Working size and weight

TILE SIZE	ACTUAL RECTIFIED SIZE	M ² /TILE	KG/TILE
200 x 1200	197 x 1195	0.24m ²	≤11kg

Load extension curve

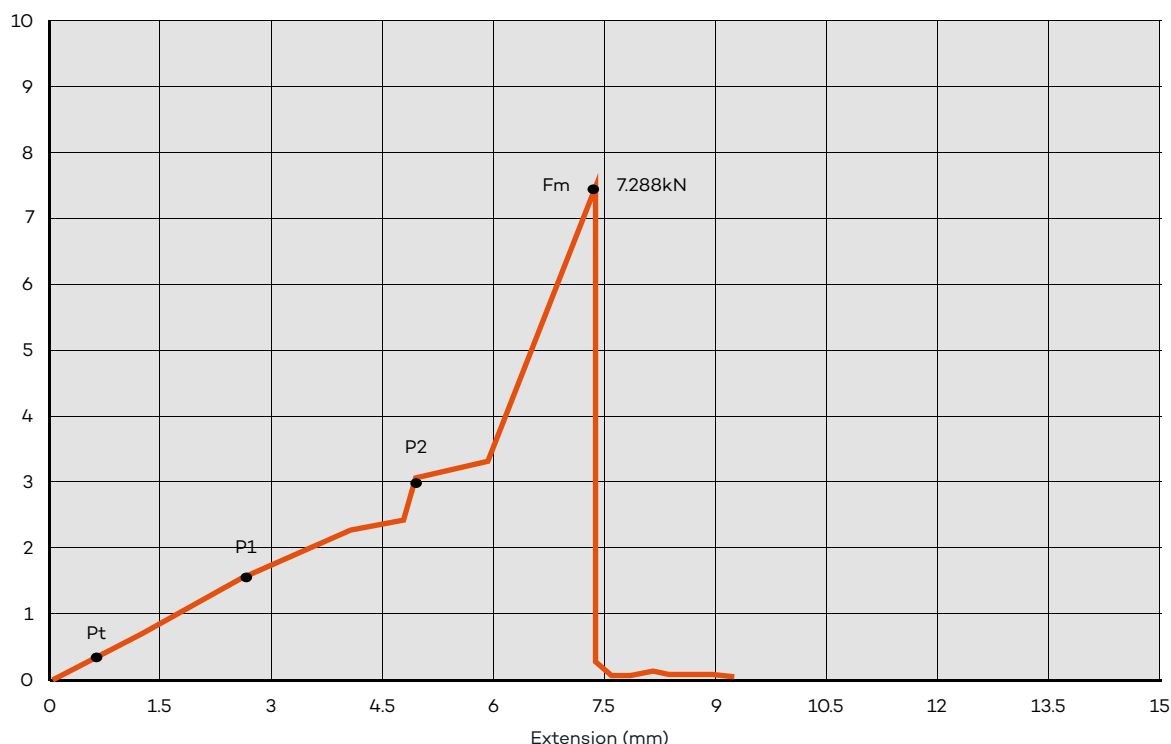

RAAFT® PORCELAIN DECKING BREAKAGE TEST RESULTS

* Test completes with joists at 400mm centres.

Find out more or request a sample

Email sales@raaftsystems.com or visit raaftsystems.com

© 2025 Raaft® Ltd. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. Any images and diagrams used in this sheet are intended only as illustrations. No rights can be derived from them.

Ref: **DS-AM-1223** Last update: August 2025

FARRINO COMO & MILANO PORCELAIN DECKING


TECHNICAL DATA SHEET



Product finishes

Wood

COMO



Brown


MILANO



Honey



Box



Age

COLOUR	SIZE	THICKNESS	CODE
Brown	30 x 120cm	-	401018
Honey	30 x 120cm	-	401019
Box	30 x 120cm	-	413010
Age	30 x 120cm	-	413011

LRV data available upon request

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com

© 2025 Raft® Ltd. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. Any images and diagrams used in this sheet are intended only as illustrations. No rights can be derived from them.

Ref: **DS-AM-1223** Last update: August 2025

FARRINO COMO & MILANO PORCELAIN DECKING

TECHNICAL DATA SHEET



Regularity characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Length and width	ISO 0545-2	±0.6%	±2mm	≥3400N
Thickness	ISO 0545-2	±5.0%	±0.5mm	≥2720N
Squareness	ISO 0545-2	±0.5%	±2mm	≤1.8mm
Straightness of sides	ISO 0545-2	±0.5%	±1.5mm	≥13mm
Surface flatness	ISO 0545-2	±0.5%	±2mm	≤7.0%

Structural characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Water absorption	ISO 0545-3	±0.5%		±0.1%
	ASTM C373			In accordance
Breaking strength	ISO 0545-4	≥1300N		≥7,288N
Modulus of rupture	ISO 0545-4	≥35mm ³		≥45 N/mm ³
Breaking load class	EN1339	±0.5%		U 11
				T11

Surface characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Resistance to deep abrasion	ISO 0545-6	≤175mm ³		≤155mm ³

Thermal and Hygrometric characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Coefficient of linear thermal expansion	ISO 0545-8	Test method available		<7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	ISO 0545-9	Test method available		Guaranteed
Frost resistance	ISO 0545-12	Required		In accordance

Chemical characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED		FARRINO VALUES
Chemical resistance	ISO 0545-13	Test method available		Guaranteed
Stain resistance	ISO 0545-14	Test method available		Guaranteed

Find out more or request a sample

Email sales@raaftsystems.com or visit raaftsystems.com

FARRINO COMO & MILANO PORCELAIN DECKING

TECHNICAL DATA SHEET



Slip resistance

TECHNICAL FEATURES	SPECIFICATION	VALUES REQUIRED	FARRINO VALUES
Dynamic slider	BCRA	Test method available	>0.4
Static slider	ASTM C1028	Test method available	-
Inclined platform	DIN 51130	Test method available	R11
Pendulum test value (PTV) - dry	BS EN 14231	36+	72
Pendulum test value (PTV) - wet	BS EN 14231	36+	65

Working size and weight

TILE SIZE	ACTUAL RECTIFIED SIZE	M2/TILE	KG/TILE
600 x 600	596 x 596	0.3600	≤16.88
600 x 900	596 x 1195	0.5400	≤25.33
300 x 1200	297 x 1195	0.3600	≤16.88
600 x 1200	596 x 1195	0.7200	≤33.77

Packaging and weights

TILE SIZE	THICKNESS	BOX SPECIFICATION			PALLET SPECIFICATION		
		PIECES/ BOX	SQM/ BOX	Kg/ BOX	TILES/ PALLET	SQM/ PALLET	Kg/ PALLET
225 x 225	20mm	12	0.720	≈67.54	45	51.84	≈1034.82
225 x 454	20mm	6	0.810	≈37.99	42	14.58	≈810.43
300 x 600	20mm	3	0.720	≈25.33	40	8.10	≈506.52
300 x 1200	20mm	2	0.720	≈26.38	36	16.88	≈1519.56
600 x 600	20mm	2	0.563	≈50.65	30	45.36	≈5673.02
450 x 900	20mm	2	0.960	≈33.77	27	17.28	≈810.43
400 x 1200	20mm	2	0.720	≈33.77	24	25.92	≈949.73
600 x 900	20mm	2	2.880	≈28.49	18	5.47	≈303.91
750 x 750	20mm	1	1.080	≈135.07	42	51.84	≈512.85
600 x 1200	20mm	1	0.540	≈33.77	15	28.80	≈1013.04
300 x 2400	20mm	1	1.440	≈28.75	36	12.26	≈759.78
900 x 900	20mm	1	0.810	≈45.02	18	25.92	≈911.74
1200 x 1200	20mm	1	0.613	≈39.99	20	34.02	≈1595.54
1200 x 2400	20mm	1	0.608	≈33.77	9	32.40	≈3039.12

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com

FARRINO PORCELAIN DECKING

TECHNICAL DATA SHEET



Wind uplift

This product has been tested and complies with BS EN 1991-1-4:2005+A1:2010. Please consult our certification for verification.



Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com

© 2025 Raft® Ltd. At the time of writing and publication of the sheet, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. Any images and diagrams used in this sheet are intended only as illustrations. No rights can be derived from them.

Ref: DS-AM-1223 Last update: August 2025

FARRINO PORCELAIN DECKING

TECHNICAL DATA SHEET



Installation information

By mounting on adjustable pedestal systems or solid concrete bases. If mounted on adjustable pedestals over 100mm in height, an optional fibreglass mesh is available upon request.

Sustainability

Farrino porcelain tiles are manufactured by dry pressing and kilning a mixture of naturally occurring minerals and clays to create a stable and durable product with long-life expectancy.

Porcelain tiles have a lower environmental impact than many other finishing materials: they will not act as 'sink' absorbing volatile organic compounds (VOCs) or other chemicals from surrounding materials, nor are they a source of harmful contaminants. They can also be maintained without the need for solvent-based cleaners.

Product maintenance

Our Farrino tiles are easy to clean and resist most chemicals. They're UV stable and only have 0.01% porosity. It's a good idea to clean them once or twice a year, depending on local weather conditions.

Use a high-pressure cleaner from at least 20cm away or scrub with a mild all-purpose cleaner and water. For daily cleaning, just sweep regularly and rinse with water, a soft brush, and a mild cleaner or suds.

Fire rated

Farrino tiles are made using porcelain which does not burn and is not a fire hazard.

Protective equipment

We recommend that PPE (Personal Protective Equipment) is used when installing the Farrino tiles:

- a) **Good strong safety boots/shoes to protect the feet.**
- b) **Protective eyewear such as safety glasses.**
- c) **Strong gloves to protect the hands.**
- d) **If using loud cutting equipment then ear plugs or defenders should be worn.**

Storage and handling

In preparation for delivery, Farrino tiles are securely packed into cardboard boxes to ensure no movement during transit.

Depending on the size and weight of the consignment they may be palletised. Until the point of installation, the tiles should be stored fully packed in a dry environment.

Stability

Farrino porcelain tiles are high performance products that are hard wearing, frost proof, non-slip and UV stable. They are easy to clean and resistant to mildew, moss and algae making them exceptionally suitable for external terrace and balcony areas and public outdoor spaces.



Find out more or request a sample

Email sales@raaftsistemas.com or visit raaftsistemas.com

FARRINO PORCELAIN DECKING

TECHNICAL DATA SHEET



Accessories

Venice clip

The genesis of our product stemmed from valuable feedback received from a domestic building grappling with water pooling issues on their porcelain tiles. After meticulous contemplation and design efforts spanning several months, the solution was crafted.


The predicament of water pooling takes on greater significance with the introduction of new materials to the UK market. Despite tiles boasting ratings of R11 or higher, the accumulation of water transforms into ice during winter, prompting the exclusion of porcelain from specifications on roof terraces nationwide.

Enter our innovative product, poised to address this challenge effectively. Raaft® now offers a solution enabling water drainage from tiles within a precise 1-hour time frame, aligning seamlessly with NHBC 9.1.15 guidelines. According to these standards, standing water post-rain should neither exceed 5mm in depth nor cover an area surpassing 1m².


We prioritize subtlety, employing transparent materials potentially matching Raaft®'s specified tiles. The Venice clip is designed to break the surface tension of the tile, similar to a grout joint where porcelain tiles are installed on cement. When porcelain is installed onto a loose laid system the joints are exposed which meant the files fill with water due to surface tension.

The product is flush to the surface reducing the chances of feet being caught.

During installation, especially in wind uplift scenarios, our design incorporates a clip securely inserted into the groove. This not only ensures a snug fit but also acts as a protective 'buffer' between tiles, facilitating removal and reinstallation without compromising structural integrity.

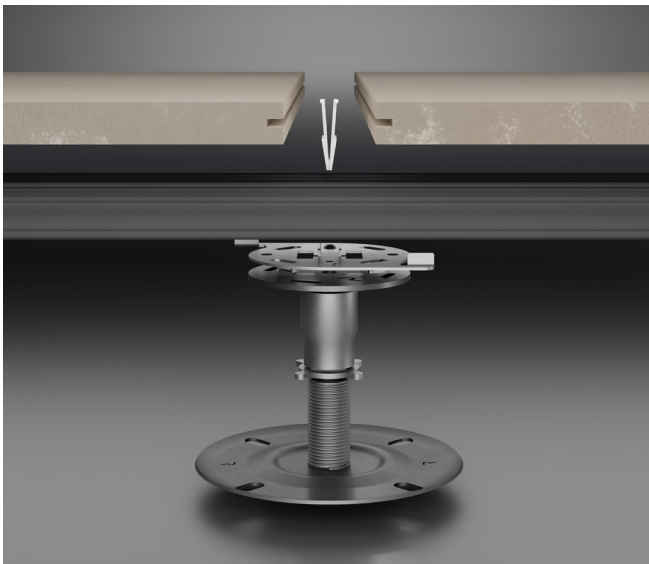

Venice Clip Push – this item serves as a universal solution for all porcelain within the RAAFT® collection.

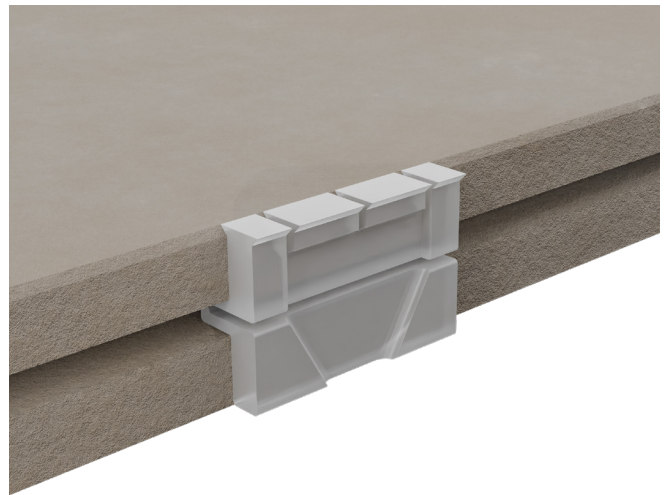

Venice Clip Uplift

Find out more or request a sample

Email sales@raaftsystems.com or visit raaftsystems.com